



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

U.D

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
10/621,465	07/18/2003	Hiroyoshi Funato	R2184.0056/P056-B	1137
24998	7590	01/04/2008	EXAMINER	
DICKSTEIN SHAPIRO LLP			CHANG, AUDREY Y	
1825 EYE STREET NW			ART UNIT	
Washington, DC 20006-5403			PAPER NUMBER	
			2872	
			MAIL DATE	
			DELIVERY MODE	
			01/04/2008	
			PAPER	

Please find below and/or attached an Office communication concerning this application or proceeding.

The time period for reply, if any, is set in the attached communication.

Office Action Summary

Application No.

10/621,465

Applicant(s)

FUNATO, HIROYOSHI

Examiner

Audrey Y. Chang

Art Unit

2872

-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address --

Period for Reply

A SHORTENED STATUTORY PERIOD FOR REPLY IS SET TO EXPIRE 3 MONTH(S) OR THIRTY (30) DAYS, WHICHEVER IS LONGER, FROM THE MAILING DATE OF THIS COMMUNICATION.

- Extensions of time may be available under the provisions of 37 CFR 1.136(a). In no event, however, may a reply be timely filed after SIX (6) MONTHS from the mailing date of this communication.
- If NO period for reply is specified above, the maximum statutory period will apply and will expire SIX (6) MONTHS from the mailing date of this communication.
- Failure to reply within the set or extended period for reply will, by statute, cause the application to become ABANDONED (35 U.S.C. § 133). Any reply received by the Office later than three months after the mailing date of this communication, even if timely filed, may reduce any earned patent term adjustment. See 37 CFR 1.704(b).

Status

- 1) ☒ Responsive to communication(s) filed on 26 October 2007.
- 2a) ☐ This action is **FINAL**. 2b) ☒ This action is non-final.
- 3) ☐ Since this application is in condition for allowance except for formal matters, prosecution as to the merits is closed in accordance with the practice under *Ex parte Quayle*, 1935 C.D. 11, 453 O.G. 213.

Disposition of Claims

- 4) ☒ Claim(s) 30, 32-44, 46 and 48-52 is/are pending in the application.
- 4a) Of the above claim(s) _____ is/are withdrawn from consideration.
- 5) ☐ Claim(s) _____ is/are allowed.
- 6) ☒ Claim(s) 30, 32-44, 46, and 48-52 is/are rejected.
- 7) ☐ Claim(s) _____ is/are objected to.
- 8) ☐ Claim(s) _____ are subject to restriction and/or election requirement.

Application Papers

- 9) ☐ The specification is objected to by the Examiner.
- 10) ☐ The drawing(s) filed on _____ is/are: a) ☐ accepted or b) ☐ objected to by the Examiner.
Applicant may not request that any objection to the drawing(s) be held in abeyance. See 37 CFR 1.85(a).
Replacement drawing sheet(s) including the correction is required if the drawing(s) is objected to. See 37 CFR 1.121(d).
- 11) ☐ The oath or declaration is objected to by the Examiner. Note the attached Office Action or form PTO-152.

Priority under 35 U.S.C. § 119

- 12) ☐ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).
- a) ☐ All b) ☐ Some * c) ☐ None of:
- ☐ Certified copies of the priority documents have been received.
 - ☐ Certified copies of the priority documents have been received in Application No. _____.
 - ☐ Copies of the certified copies of the priority documents have been received in this National Stage application from the International Bureau (PCT Rule 17.2(a)).
- * See the attached detailed Office action for a list of the certified copies not received.

Attachment(s)

- | | |
|---|---|
| 1) <input type="checkbox"/> Notice of References Cited (PTO-892) | 4) <input type="checkbox"/> Interview Summary (PTO-413)
Paper No(s)/Mail Date: _____ |
| 2) <input type="checkbox"/> Notice of Draftsperson's Patent Drawing Review (PTO-948) | 5) <input type="checkbox"/> Notice of Informal Patent Application |
| 3) <input type="checkbox"/> Information Disclosure Statement(s) (PTO/SB/08)
Paper No(s)/Mail Date: _____ | 6) <input type="checkbox"/> Other: _____ |

DETAILED ACTION

Continued Examination Under 37 CFR 1.114

1. A request for continued examination under 37 CFR 1.114, including the fee set forth in 37 CFR 1.17(e), was filed in this application after final rejection. Since this application is eligible for continued examination under 37 CFR 1.114, and the fee set forth in 37 CFR 1.17(e) has been timely paid, the finality of the previous Office action has been withdrawn pursuant to 37 CFR 1.114. Applicant's submission filed on October 26, 2007 has been entered.
2. This Office Action is also in response to applicant's amendment filed on October 26, 2007, which has been entered into the file.
3. By this amendment, the applicant has amended claim 30 and has newly added claims 50-52.
4. Claims 30, 32-44, 46, and 48-52 remain pending in this application.

Response to Amendment

5. The amendment filed on October 26, 2007 is objected to under 35 U.S.C. 132(a) because it introduces new matter into the disclosure. 35 U.S.C. 132(a) states that no amendment shall introduce new matter into the disclosure of the invention. The added material which is not supported by the original disclosure is as follows: the newly added claims 50-52 recite that the uni-directionally stretched birefringence layer is patterned before attaching to the transparent substrate and the photoresist and mask are formed on the birefringence layer before being attached to the transparent substrate. Also the substrate that the substrate that the polymer material removed from is the same substrate that the birefringence layer is attached to and being patterned. The specification NEVER teaches that the birefringence layer is patterned before being attached to the substrate and the photoresist and the mask (used for patterning the layer) are formed on the birefringence layer before being attached to the transparent substrate. In fact all the figures in the specification teaches that the layer is patterned AFTER

being attached to the substrate. The specification also fails to explicitly state that the substrates are the same.

Applicant is required to cancel the new matter in the reply to this Office Action.

Claim Rejections - 35 USC § 112

6. The following is a quotation of the first paragraph of 35 U.S.C. 112:

The specification shall contain a written description of the invention, and of the manner and process of making and using it, in such full, clear, concise, and exact terms as to enable any person skilled in the art to which it pertains, or with which it is most nearly connected, to make and use the same and shall set forth the best mode contemplated by the inventor of carrying out his invention.

7. **Claims 30 and 50-52 are rejected under 35 U.S.C. 112, first paragraph**, as failing to comply with the written description requirement. The claim(s) contains subject matter which was not described in the specification in such a way as to reasonably convey to one skilled in the relevant art that the inventor(s), at the time the application was filed, had possession of the claimed invention.

The reasons for rejection based on the newly added matters are set forth in the paragraph above. The newly added claims 50-51 are also contradicting to the method steps stated in the its based claim 30.

8. **Claims 50-51 are rejected under 35 U.S.C. 112, first paragraph**, as failing to comply with the enablement requirement. The claim(s) contains subject matter which was not described in the specification in such a way as to enable one skilled in the art to which it pertains, or with which it is most nearly connected, to make and/or use the invention.

The specification fails to teach how could the uni-directionally stretched birefringent layer can be patterned before being attaching to the substrate. The specification fails to teach without the support of the substrate that the layer can be patterned by forming the photoresist and mask.

9. The following is a quotation of the second paragraph of 35 U.S.C. 112:

The specification shall conclude with one or more claims particularly pointing out and distinctly claiming the subject matter which the applicant regards as his invention.

10. Claims 30 and 50-51 are rejected under 35 U.S.C. 112, second paragraph, as being indefinite for failing to particularly point out and distinctly claim the subject matter which applicant regards as the invention.

The newly added claims 50-51 recite that the uni-directionally stretched birefringence layer is patterned by forming the photoresist and mask on the layer before attaching to the transparent substrate, however its based claim 30 recite that the layer is patterned after the layer is attached to the transparent substrate. The scopes of the claims therefore are unclear.

Claim Rejections - 35 USC § 103

11. The following is a quotation of 35 U.S.C. 103(a) which forms the basis for all obviousness rejections set forth in this Office action:

(a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subject matter sought to be patented and the prior art are such that the subject matter as a whole would have been obvious at the time the invention was made to a person having ordinary skill in the art to which said subject matter pertains. Patentability shall not be negated by the manner in which the invention was made.

12. Claims 30, 32 and 35-42 and newly added claims 50-52 are rejected under 35 U.S.C. 103(a) as being unpatentable over to Takeda et al (PN. 5,739,952) in view of the patent issued to Nakamura et al (PN. 5,244,713), Takeda et al (PN. 5,793,733).

Takeda et al ('952) teaches a *polarization beam splitter* that is comprised of a *holographic grating pattern* (Figures 1-4) formed with *birefringence film* (2) laying on a *transparent substrate* (1). The birefringence layer (2) has an anisotropic property such that the *refractive indices* (n_o and n_e) of the layer for light propagates in the *ordinary* direction (S-polarization direction) and *extraordinary* direction (P-polarization direction) are different from each other. This difference in refractive indices will make the holographic grating imparting *different* phase value to the S-polarization and P-polarization components of an incident light which therefore will diffract the two components of light differently.

Takeda et al teaches that the holographic grating pattern of the polarization beam splitter is formed by first *depositing* a monomeric diacetylene film (i.e. an organic polymer film) on a *substrate* and then polymerized it to form a polymer of diacetylene, which is an *organic polymer material*. The polymer material is then *rubbed* in *one direction to form the birefringence layer*. Takeda et al further teaches that a *resist* for forming a grating is applied on top of the polydiacetylene film to *form the grating pattern* in the film, (please see columns 8-9). The grating pattern is holographic because Takeda et al teaches explicitly that the grating may also be formed by two-beam interference method, (please see column 9, lines 1-5).

This reference has met all the limitations of the claims with the exception that although it teaches that polymer film is *rubbed* in one direction but it does not teach explicitly that the polymer film is uni-directionally stretched and heated to form the birefringence film. However rubbing in one direction has the essentially the same effect as uni-directional stretching and furthermore using uni-directional stretching and heating process to form birefringence film from an *organic polymer* film is rather well known in the art as demonstrated by the teachings of **Nakamura** et al wherein an *organic polymer film* is **heat treated and then uniaxially stretched, (i.e. uni-directionally stretched)** to make the film have *optimum* birefringence, (please see column 4, lines 6-26). Nakamura et al teaches that polymer materials that can be made birefringence by heat treatment and stretching method include *polycarbonates*, *polystyrene* and *polyamide resins*, (please see column 2, lines 53-69). It would then have been obvious to one skilled in the art to use the well-known heating and uniaxial stretching method and the well known *organic polymer* materials as an alternative materials and method to make the *birefringence* film that can be used as the birefringence layer for the holographic grating of Takeda et al for the benefit of using a manufacture method to obtain *optimum* birefringence of the film, and to cut manufacture cost by using conventionally accessible and known polymer materials.

Although these references do not teach explicitly that the organic polymer film is applied on a substrate and then removed from the substrate and do not teach, the birefringence film is reattached to the substrate via an *adhesive* layer however such processes have to be either inherently met by the disclosures of Takeda et al or disclosure of Nakamura et al in the step of forming the organic polymer film before the heating and stretching treatment steps and in the step of adhering the birefringence film to the substrate or obvious modifications to one skilled in the art since the organic polymer film has to be **first** formed on some substrate and the substrate cannot be included in the heating and stretching steps for it will interrupt such treatments for the film to make the birefringence film. Furthermore, whether to use an adhesive layer to attach the birefringence film layer to the substrate or not really provides no patentable distinction since the final result, namely having the birefringence film layer *attached* to the substrate, is achieved by the disclosure of Takeda et al. Also Takeda et al specifically teaches that equally good result will be achieved by either having an adhesive layer between of the birefringence layer and the substrate or not having one, (please see column 27, lines 10-15). Such modification therefore is considered as obvious matters of design choice to one skilled in the art for making the adhesion between the two by desired manner.

With regard to the feature concerning the periodic grating pattern formed by placing photo-resist and mask, this reference does not teach such explicitly. Takeda et al ('952) teaches that the periodic grating is formed by using two beams interference method but does not teach explicitly that it is formed by using photo-resist mask. However using photo-resist layer with a mask to form periodic grating pattern is a standard method in the art as demonstrated by the teachings of **Takeda et al ('733)**, wherein a polarization grating is formed by placing a photo-mask (14) formed in a photo-resisting material and placing such photo-mask over the birefringence layer (12) and using UV irradiation to form the periodic grating pattern, (please see Figures (2a) to 2(c), column 5, lines 5-23). The photo-mask (14) has to be formed in a photo-resist material in order for it to stand the high photo energy of the UV beam. It is

implicitly true that the substrate (11, figures 2(a) to 2(c)) *remains unpatterned*. It would then have been obvious to one skilled in the art to apply the teachings of Takeda et al ('733) as an alternative means for forming the desired grating pattern in the birefringence layer for the benefit of perhaps providing the capability of mass producing such holograms by using a standard photo-mask.

With regard to the feature concerning receiving a light beam, Takeda et al ('952) and Takeda et al ('733) **both** teach that the polarization hologram is capable of diffracting light beam based on its polarization and wavelength, such is a direct result of the diffraction equations stated in equations such as 26 and 28.

Claim 30 includes the feature that the transparent substrate remains unpatterned. Takeda et al ('952) teaches explicitly that the substrate remains **unpatterned** wherein the diffraction grating is formed in the birefringent film (2, Figure 4) only. Takeda et al ('733) also teaches that the substrate remains **unpatterned**, (please see Figure 2(c)).

Claim 30 has been amended to include the feature of forming an isotropic overcoat layer to enclose the birefringent layer. Takeda et al ('952) in a different embodiment teaches that an isotropic layer (20, Figure 12) can be formed over the grating patterned birefringence film (2) to enclose the birefringence layer.

With regard to claim 32, Nakamura et al reference teaches that the suitable polymers that can be heat stretched to form birefringence film includes polycarbonate, polystyrene and polyamide film, (please column 2, lines 53-69). The modification would have been obvious to one skilled in the art since it has been held to be within the general skill of a worker in the art to select a known material on the basis of its suitability for the intended used as a matter of obvious design choice. In re Leshin, 125 USPQ 416.

With regard to claim 35, Nakamura et al teaches that the heat stretching process is done at a temperature between 190 to 230 °C. Although it does not teach explicitly that it is heated at 350 °C but

such feature is considered to be obvious modification since at either temperature the same result namely heating the organic polymer film in the processes of forming it a birefringence film is achieved.

With regard to claims 37-39, these references teach many different examples of birefringence film with different refractive index in the ordinary and extraordinary direction, however they do not teach explicitly to have the particular values claimed in the claims. But such modification is considered to be obvious matters of design choices to one skilled in the art to make the birefringence film with desired refractive indices so that the polarization beam splitter with the holographic grating pattern will behave as desired.

With regard to claims 40 and 41, Takeda et al teaches that the **optical path phase difference** for the ordinary and extraordinary light paths for the grating patterned birefringence film with the grooves of the grating pattern formed with isotropic material are denoted by equations 26 and 28, i.e.

$$\text{OPD (o)} = (n_o - n_c) * d2 * k, \quad \text{OPD(e)} = (n_e - n_c) * d2 * k,$$

Wherein n_o and n_e are the refractive indices of the birefringence film for the ordinary and extraordinary direction and n_c is the refractive index of the isotropic layer and $d2$ is the grating height and k is $2\pi/\lambda$, λ being the wavelength, (k is **typographically wrong** as stated in column 14 line 3 but it should be defined as $2\pi/\lambda$, as in columns 6, line 33, column 22, line 61 etc. in order to keep the equations dimensionally correct). Takeda et al teaches that in order for the ordinary light or the extraordinary light to be not diffracted by the grating the **optical path phase difference** has to be an even multiple of π , i.e. $2m\pi$, and in order for them to be diffracted the **optical path phase difference** has to be an odd multiple of π , i.e. $(2m+1)\pi$. Takeda et al teaches that the beam splitter including the holographic grating is designed to totally diffract one component of the beam and leaves the other not diffracted, (please see column 7, lines 18-24). This then requires one of the optical path difference equals $2m\pi$ and the other equals $(2m+1)\pi$. This then gives the following results:

$$\text{OPD(o)} = 2m\pi = (n_o - n_c) * d2 * k, \text{ which gives } (n_o - n_c) d2 = m \lambda, \text{ and}$$

$$\text{OPD (e)} = (2m+1)\pi = (n_e - n_c) * d2 * k, \text{ which gives } (n_e - n_c) * d2 = (2m+1) \lambda,$$

Or,

$$\text{OPD(o)} = (2m+1)\pi = (n_o - n_c) * d2 * k, \text{ which gives } (n_o - n_c) d2 = (2m+1) \lambda, \text{ and}$$

$$\text{OPD (e)} = 2m\pi = (n_e - n_c) * d2 * k, \text{ which gives } (n_e - n_c) * d2 = m \lambda.$$

With regard to claim 42, these references do not teach explicitly to use spin coating for applying the organic polymer to the substrate, however such process is extremely well known in the art, such modification would have been obvious to one skilled in the art as an alternative means to apply the polymeric film on the substrate. The isotropic layer can be an overcoat layer (20) as shown in Figure 12.

With regard to the newly added claims 50 and 51, the references do not teach explicitly that the birefringence layer is patterned before being attached to the substrate and the photoresist and mask are formed on the layer before the layer being attached to the substrate. The specification also fails to disclose such since without placing the birefringent layer on a substrate it is impossible to pattern the layer. Furthermore, they are contradicting to their based claim. These features are really cannot be examined here.

With regard to claim 52, these references do not teach that the substrate for preparing the layer and for patterned the layer are the same or not, however if the same substrate can be used, such modification would be obvious to one skilled in the art for the benefit of reducing the cost of manufacture.

13. Claims 33-34 are rejected under 35 U.S.C. 103(a) as being unpatentable over the patent issued to Takeda et al ('952) and Nakamura et al and Takeda et al ('733) as applied to claim 30 above, and further in view of the patent issued to Yoshimi et al (PN.5,245,456) and Yamamoto et al (PN. 6,040,418).

The polarization beam splitter comprises a holographic grating taught by **Takeda et al** in combined with the teachings of **Nakamura et al** as and **Takeda et al** ('733) described for claim 30 above have met all the limitations of the claims. These references however do not teach explicitly that the organic polymer material comprises polyimide and the polyimide film is obtained with the claimed acid and solvent solution. **Yoshimi et al** in the same field of endeavor teaches that polyimide resin shows positive birefringence which is then a suitable birefringence polymer material. **Yamamoto et al** in the same field of endeavor teaches that it is standard knowledge in the art to prepare polyimides using polyamide acid with solvent, (please see columns 1 and 2). It would then have been obvious to one skilled in the art to apply the teachings of **Yoshimi et al** and **Yamamoto et al** to prepare polyimide film as an alternative suitable polymer material for the birefringence film. Since it has been held to be within the general skill of a worker in the art to select a known material on the basis of its suitability for the intended use as a matter of obvious design choice. In re Leshin, 125 USPQ 416.

14. **Claims 43-45 are rejected under 35 U.S.C. 103(a) as being unpatentable over Takeda et al (PN. 5,739,952) in view of the patent issued to Nakamura et al (PN. 5,244,713).**

Takeda et al teaches a *polarization beam splitter* that is comprised of a *holographic grating pattern* (Figures 1-3) formed with *birefringence film* (2) laying on a *substrate* (1). The birefringence layer (2) has an anisotropic property such that the *refractive indices* (n_o and n_e) of the layer for light propagates in the *ordinary* direction (S-polarization direction) and *extraordinary* direction (P-polarization direction) are different from each other. This difference in refractive indices will make the holographic grating imparting *different* phase value to the S-polarization and P-polarization components of an incident light which therefore will diffract the two components of light differently.

This reference has met all the limitations of the claims with the exception that although it teaches that the birefringence film comprises an organic polymer film is *rubbed* in one direction but it does not

teach *explicitly* that it is uni-directionally stretched birefringence film. However using uni-directional stretching and heating process to form birefringence film from an *organic polymer* film is rather well known in the art as demonstrated by the teachings of Nakamura et al wherein an *organic polymer film* is **heat treated and then uniaxially stretched, (i.e. uni-directionally stretched)** to make the film have *optimum* birefringence, (please see column 4, lines 6-26). It would then have been obvious to one skilled in the art to use the well-known heating and uniaxial stretching method and the well known *organic polymer* materials as alternative materials and method to make the birefringence film to be used as the birefringence layer for the holographic grating of Takeda et al for the benefit of using a manufacture method to obtain *optimum* birefringence of the film, and to cut manufacture cost by using a conventionally accessible and known polymer materials.

With regard to the feature having the depth of the grating is essentially equal to a thickness of the birefringence layer. This is corresponding to the situation of making the thickness of d3 being zero as in equations (22 and 23, to Figure 4) of Takeda et al ('952). Such modification would certainly have been obvious to one skilled in the art for the benefit of making the polarization grating with less material and therefore less cost. Furthermore, it has been held when the general conditions of a claim are disclosed in the prior art, discovering the optimum or workable ranges involve only routine skill in the art. In re Aller, 105 USPQ 233.

Claim 43 has been amended to include the feature of "*a substantially planar* substrate". Takeda et al teaches explicitly that the substrate is substantially planar as shown in Figures 4, 9(a) and 9(b)).

With regard to claim 44, in a different embodiment Takeda et al teaches that an isotropic layer (20, Figure 12) can be formed over the grating patterned birefringence film (2) to enclose the birefringence layer.

15. Claim 46 is rejected under 35 U.S.C. 103(a) as being unpatentable over the patents issued to Takeda et al and Nakamura et al as applied to claim 43 above, and further in view of the patent issue to Iwatsuka et al (PN. 5,245,471).

The polarization beam splitter including the holographic grating taught by Takeda et al in combination with the teachings of Nakamura et al as described for claim 43 above have met all the limitations of the claims. These references however do not teach to have the features of having a second substrate formed with an adhesive layer as the isotropic layer. Iwatsuka et al in the same field of endeavor teaches a polarizer including grating pattern formed in birefringence layer wherein a second substrate (19, Figure 6E) is formed on top of an adhesive layer (18) serves as the isotropic layer that fills the grooves of the grating patterned birefringence layer (4). It would then have been obvious to one skilled in the art to apply the teachings of Iwatsuka et al to modify the design of the beam splitter of Takeda et al accordingly for the benefit of providing the polarization beam splitter with easy handling.

16. Claim 48 is rejected under 35 U.S.C. 103(a) as being unpatentable over the patents issued to Iwatsuka et al (PN. 5,245,471) in view of the patent issued to Nakamura et al .

Iwatsuka et al teaches a method for forming a polarization hologram that is comprised of the step of providing a *substrate* (1) and forming a *birefringence layer* (2) over the substrate. The method further comprises the step of forming a *photo-resist mask* (3) over the birefringence layer and forming a *periodic grating pattern* on the birefringence film without etching the substrate. The method then comprises the step of *removing* the photo-mask and forming an *isotropic layer* (4, 9 , 11 or 18) over the patterned birefringence layer, (please see Figures 1, 2(A) to 2(E) and 6(A) to 6(E)).

This reference has met all the limitations of the claim with the exception that it does not teach explicitly that the birefringence layer is an uni-directional stretched organic polymer layer. However birefringence layer formed by uniaxially stretching organic polymer layer is very well known in the art as

demonstrated by the teachings of **Nakamura** et al wherein an *organic polymer film* is *heat treated and then uniaxially stretched*, (i.e. *uni-directionally stretched*) to make the film have *optimum* birefringence, (please see column 4, lines 6-26). It would then have been obvious to one skilled in the art to apply the teachings of **Nakamura** et al to use a birefringence layer that is comprised of an uniaxially stretched polymer layer for the benefit of allowing different materials being used to form the polarization grating and at same time using a birefringence layer that is made to have *optimized* birefringence which is essential for the function of the polarization hologram.

With regard to the formula for designing the polarization hologram, as recited in claim 48, Iwatsuka et al teaches such formula explicitly. Iwatsuka et al teaches that if the isotropic layer (11) has refractive index of (n2) and the birefringent layer (10) has refractive index for one polarization, which may be p-polarization, is (n1+) and for the other polarization, which may be s-polarization, is (n1-) and the thickness of the grating pattern of the polarization hologram is "d" then the following equations holds:

$$[(n1+) - (n2)] * d = N1 * L \text{ and } [(n1-) - (n2)] * d = (N2 + 1/2) * L, (L \text{ being the wavelength}), (\text{please see columns 4-5}).$$

With regard to claim 49, the periodic grating pattern has different refractive indices for two orthogonal polarization direction, in the birefringent region (2).

With regard to the feature "a top surface portion of the substrate is not covered by the uni-directionally stretched organic polymer layer" and the isotropic overcoat is "over the patterned stretched organic polymer layer and directly contacting the top surface", **Iwatsuka** et al teaches **explicitly** that the polarization hologram is formed by using a photo-resist mask (3) on a birefringent film (2), which is the organic polymer layer, that is on top surface portion of the substrate (1). After the photo-resist photomask is removed, an *isotropic adhesive layer* (18, Figure 6(E)) serves as the *isotropic overcoat* covers both the birefringent diffraction pattern (4) and the exposed top portion of the substrate, (please see Figure 6(E)). And as shown in Figure 6(E) a top portion of the substrate is not covered by the organic polymer or the

birefringent film (2) and the isotropic overcoat (3) also is directly contacting the top substrate at the portion that is not covered by the birefringent film.

17. **Claim 49 is rejected under 35 U.S.C. 103(a) as being unpatentable over the patents issued to Iwatsuka et al (PN. 5,245,471) in view of the patents issued to Nakamura et al and Yoshimi et al (PN.5,245,456) .**

Iwatsuka et al teaches a method for forming a polarization hologram that is comprised of the step of providing a *substrate* (1) and forming a *birefringence layer* (2) over the substrate. The method further comprises the step of forming a *photo-resist mask* (3) over the birefringence layer and forming a *periodic grating pattern* on the birefringence film without etching the substrate. The method then comprises the step of *removing* the photo-mask and forming an *isotropic layer* (4, 9 , 11 or 18) over the patterned birefringence layer, (please see Figures 1, 2(A) to 2(E) and 6(A) to 6(E)).

This reference has met all the limitations of the claim with the exception that it does not teach explicitly that the birefringence layer is an uni-directional stretched organic polymer layer. However birefringence layer formed by uniaxially stretching organic polymer layer is very well known in the art as demonstrated by the teachings of **Nakamura et al** wherein an *organic polymer film is heat treated and then uniaxially stretched, (i.e. uni-directionally stretched)* to make the film have *optimum* birefringence, (please see column 4, lines 6-26). It would then have been obvious to one skilled in the art to apply the teachings of **Nakamura et al** to use a birefringence layer that is comprised of an uniaxially stretched polymer layer for the benefit of allowing different materials being used to form the polarization grating and at same time using a birefringence layer that is made to have *optimized* birefringence which is essential for the function of the polarization hologram.

With regard to the formula for designing the polarization hologram, as recited in claim 48, **Iwatsuka et al** teaches such formula explicitly. **Iwatsuka et al** teaches that if the isotropic layer (11) has

refractive index of (n2) and the birefringent layer (10) has refractive index for one polarization, which may be p-polarization, is (n1+) and for the other polarization, which may be s-polarization, is (n1-) and the thickness of the grating pattern of the polarization hologram is "d" then the following equations holds:

$$[(n1+) - (n2)] * d = N1 * L \text{ and } [(n1-) - (n2)] * d = (N2 + 1/2) * L, (L \text{ being the wavelength}), (\text{please see columns 4-5}).$$

With regard to claim 49, the periodic grating pattern has different refractive indices for two orthogonal polarization direction, in the birefringent region (2).

Claim 49 has been amended to include the feature that the uni-directionally stretched layer is a polyimide to form the birefringent layer. Iwatsuka et al teaches that the birefringent film is a dielectric film. Nakamura et al teaches that stretched resin polymers such as polycarbonate (please see column 3, lines 13-19) can be used as the birefringent layer. But they do not teach explicitly to use polyimide layer. **Yoshimi** et al in the same field of endeavor teaches that the birefringent film can also be provided by heat and stretched *polyimide film or polycarbonate film*, (please see column 3, lines 49-54). It would then have been obvious to one skilled in the art to apply the teachings to use the desired layer material to as the birefringent layer to make the polarization grating for the purpose of fulfilling the specific requirements of particular application.

With regard to the feature "a top surface portion of the substrate is not covered by the uni-directionally stretched organic polymer layer" and the isotropic overcoat is "over the patterned stretched organic polymer layer and directly contacting the top surface", **Iwatsuka** et al teaches **explicitly** that the polarization hologram is formed by using a photo-resist mask (3) on a birefringent film (2), which is the organic polymer layer, that is on top surface portion of the substrate (1). After the photo-resist photomask is removed, an *isotropic adhesive layer* (18, Figure 6(E)) serves as the *isotropic overcoat* covers both the birefringent diffraction pattern (4) and the exposed top portion of the substrate, (please see Figure 6(E)). And as shown in Figure 6(E) a top portion of the substrate is not covered by the organic polymer or the

birefringent film (2) and the isotropic overcoat (3) also is directly contacting the top substrate at the portion that is not covered by the birefringent film.

Double Patenting

18. The nonstatutory double patenting rejection is based on a judicially created doctrine grounded in public policy (a policy reflected in the statute) so as to prevent the unjustified or improper timewise extension of the "right to exclude" granted by a patent and to prevent possible harassment by multiple assignees. See *In re Goodman*, 11 F.3d 1046, 29 USPQ2d 2010 (Fed. Cir. 1993); *In re Longi*, 759 F.2d 887, 225 USPQ 645 (Fed. Cir. 1985); *In re Van Ornum*, 686 F.2d 937, 214 USPQ 761 (CCPA 1982); *In re Vogel*, 422 F.2d 438, 164 USPQ 619 (CCPA 1970); and *In re Thorington*, 418 F.2d 528, 163 USPQ 644 (CCPA 1969).

A timely filed terminal disclaimer in compliance with 37 CFR 1.321(c) may be used to overcome an actual or provisional rejection based on a nonstatutory double patenting ground provided the conflicting application or patent is shown to be commonly owned with this application. See 37 CFR 1.130(b).

Effective January 1, 1994, a registered attorney or agent of record may sign a terminal disclaimer. A terminal disclaimer signed by the assignee must fully comply with 37 CFR 3.73(b).

19. Claims 43-44 and 46 are rejected under the judicially created doctrine of obviousness-type double patenting as being unpatentable over claims 1-9 of U.S. Patent No. 6,618,344.

Although the conflicting claims are not identical, they are not patentably distinct from each other because they both claimed a polarization hologram with grating pattern formed in a birefringence layer such that the birefringence layer is a stretched organic polymer film. The feature concerning the birefringence layer being *uni-directionally stretched* as recited in claim 43 of instant application does not differentiate the instant application from the cited patent since birefringent layer comprises uni-directional stretched or uniaxially stretched polymer film is very well known and standard in the art. And it has been held to be within the general skill of a worker in the art to select a known material on the basis of its suitability for the intended use as a matter of obvious design choice. *In re Leshin*, 125 USPQ 416.

Response to Arguments

20. Applicant's arguments filed on October 26, 2007 have been fully considered but they are not persuasive. The newly amended claims have been fully considered and they are rejected for the reasons stated above.

21. In response to applicant's arguments concerning the combining the teachings of Nakamura of "stretching and heating" the polymer layer to the "merely rubbing" of the layer of Takeda ('952) would not improve the birefringence of the layer, the examiner respectfully disagrees. The one directional rubbing the polymer film is **essentially a uni-directional stretching** of the film, for they provide the **same** result, namely causing the polymer molecules oriented in a specific direction, this essentially gives rise the birefringent property. One having **basic** knowledge of material would understand that the molecules of the polymeric material are bonded to each other by the molecular force. By heating the material energy would be added to the molecules to help them free from the bonds and then ease the process of orientating the molecules. So by adopting the teachings of "stretching and heating" of polymer layer of Nakamura would certainly benefit the process of making the polymer layer to have good birefringence property, for the heating process frees the molecules for orientation. Furthermore, the birefringence of the polymer film of Takeda ('952) is the essential property for making the polarization beam splitter grating. It is certainly reasonable to try to apply the teachings of Nakamura to improve the making of birefringence layer of Takeda ('952) to improve the efficiency of the polarization beam splitter grating.

22. In response to applicant's arguments concerning the METHOD step of using an adhesive layer to attach the birefringent layer to the transparent substrate, the applicant being one skilled in the art must know the concept of using an adhesive to attach element A to element B and therefore improving the adhesion of the two elements are not a novel method that invented by the applicant rather it is common

knowledge not only to the ordinary skill in the art but to ordinary people. There is no novelty in relying on such common knowledge.

23. In response to applicant's arguments concerning the different cited references are **intended** for different purposes (such as polarization beam splitter etc) which therefore cannot be combined, the examiner respectfully disagrees. All of the cited references are concerning and based on the essential property namely the birefringence property. Whether they are meant to use the birefringence property to design a diffraction grating utilized for beam splitting or polarizer, they are based on the same birefringence property and the grating structure. The intended use does not prevent one skilled in the art to extract the basic disclosure concerning the birefringent property of the layer.

24. In response to applicant's argument questioning the cited Takeda ('952) reference teaches a polarizing beam splitter with grating structure that is suitable for any birefringent layer, the examiner wishes to point the applicant, who is skilled in the art, to study the disclosure that the Takeda to understand the grating structure is designed to be suitable for ANY birefringent layer having refractive indices (n_e/n_o) (please see all of the figures). The polarization beam splitter is based on this birefringence and the grating structure alone and NOT on how and what birefringent layer is being prepared or used.

25. In response to applicant's arguments concerning the temperature used for the heating process, the applicant being one skilled in the art must understand the concept of try and error in a laboratory to obtain the most optimum temperature range for the heating process to obtain the optimum condition for preparing the birefringent layer.

26. In response to applicant's argument concerning the formula recited in claims 40 and 41 are not met by the Takeda ('952) the examiner respectfully disagrees, since the isotropic layer can be an overcoat layer (20) as shown in Figure 12 of Takeda ('952).

27. In response to applicant's argument concerning the formula recited in the Iwatsuka reference, that does not meet the formula recited in the instant application, the examiner respectfully disagrees. Judging


from the disclosure in columns 4-5, the equations $[(n1+) - (n2)] * d = N1 * \lambda$ and $[(n1-) - (n2)] * d = (N2 + 1/2) * \lambda$, λ being the wavelength. Equation [IV] has a misprinted that is lacking the factor λ . But judging the derivation of the equations in column 4, the factor " λ " should be in equation [IV]. By identifying $(n1+)$ being " n_p " and $(n1-)$ being " n_s ", and " $n2$ " being " n_1 " then the equations are the same as the formula in claims 48 and 49.

Any inquiry concerning this communication or earlier communications from the examiner should be directed to Audrey Y. Chang whose telephone number is 571-272-2309. The examiner can normally be reached on Monday-Friday (8:00-4:30), alternative Mondays off.

If attempts to reach the examiner by telephone are unsuccessful, the examiner's supervisor, Stephone B. Allen can be reached on 571-272-2434. The fax phone number for the organization where this application or proceeding is assigned is 571-273-8300.

Information regarding the status of an application may be obtained from the Patent Application Information Retrieval (PAIR) system. Status information for published applications may be obtained from either Private PAIR or Public PAIR. Status information for unpublished applications is available through Private PAIR only. For more information about the PAIR system, see <http://pair-direct.uspto.gov>. Should you have questions on access to the Private PAIR system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free). If you would like assistance from a USPTO Customer Service Representative or access to the automated information system, call 800-786-9199 (IN USA OR CANADA) or 571-272-1000.

Audrey Y. Chang, Ph.D.
Primary Examiner
Art Unit 2872

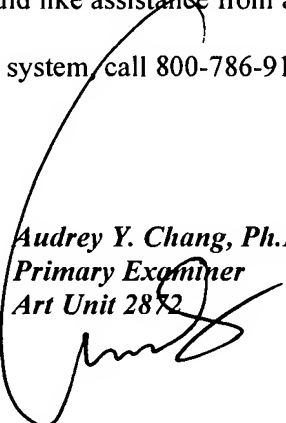

A. Chang, Ph.D.